

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: blomus GmbH

Supplier's address: Kundenservice, Zur Hubertushalle 4, 59846 Sundern, DE

Model identifier: FAROL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED-Module		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	130 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 4 000
On-mode power (P_{on}), expressed in W	1,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	350	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	110	
	Depth	110	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,466 0,418
Parameters for LED and OLED light sources:			
R9 colour rendering index value	12	Survival factor	-
the lumen maintenance factor	0,97		

(a) : not applicable;

(b) : not applicable;

Report of Spectroradiometric & Electric Analysis for Light Source

Model No.:

Sample SN:

Manufacturer:

Tested By:

Description:

Test Report No.:

Date:

Reviewed By:

Test Condition


Temperature: 25°C

RH: 58%


Spectrum Range: 350-800 nm

Scan Step: 5 nm

Spectroradiometric Parameters

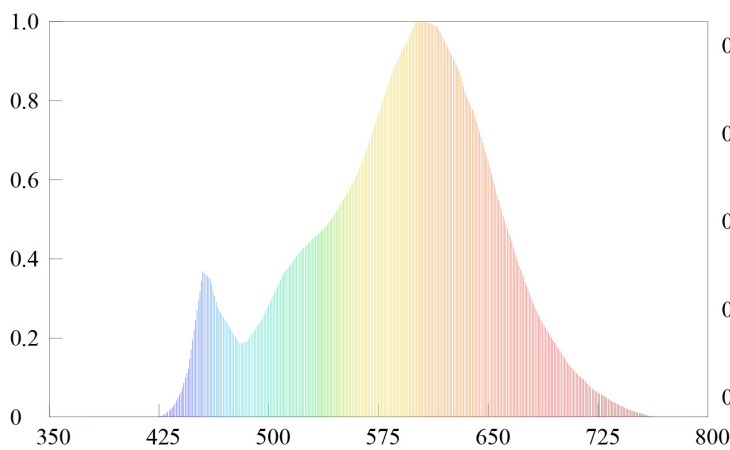

Spectral Distribution

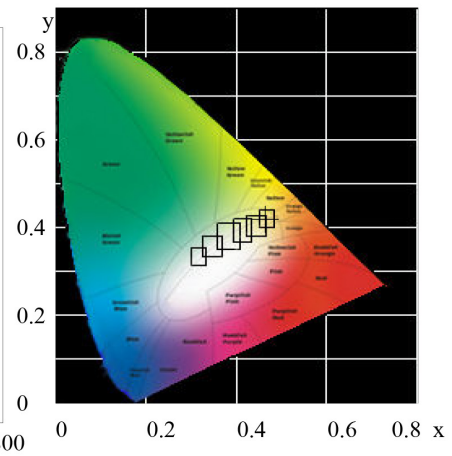

CIE1931 Chromaticity Diagram

Chromaticity Coordinates: $x=0.4624$ $y=0.4187$ $u'=0.2606$ $v'=0.5308$

Correlated Color Temperature: 2727 K

Dominant Wavelength: 582.0 nm(E)

Colour Fidelity Index: $R_f=82$

Gamut Index: $R_g=91$

Luminous Flux: 136.93 lm

Purity: 0.6460

Chromaticity Difference: $+0.00274D_{uv}$

Peak Wavelength: 605.0 nm

Color Ratio: $K_r=47.5\%$ $K_g=45.6\%$ $K_b=6.9\%$

Color Tolerance(SDCM): .5697

Bandwidth: 121.7nm

Radiant Flux: 0.385 W

Photosynthetically Active Radiation(PAR): 0.38W

Photosynthetic Photon Flux(PPF): 1.85 μ mol/s

Rendering Index: $R_a=83.5$

$R_1=83$ $R_2=93$ $R_3=95$ $R_4=81$ $R_5=83$ $R_6=93$ $R_7=82$ $R_8=59$

$R_9=12$ $R_{10}=85$ $R_{11}=81$ $R_{12}=73$ $R_{13}=86$ $R_{14}=98$ $R_{15}=74$ $R_e=78$

Electric Parameters

Voltage: 5.00 V

Current: 0.296 A


Power Factor: 1.000

Power: 1.48 W

Luminous Efficacy: 92.5 lm/W

SENSING Instruments Co.,Ltd

Model placed on the Union market from 01/01/2024



EPREL registration number: 1820479

<https://eprel.ec.europa.eu/qr/1820479>

Supplier: blomus GmbH (Importer)

Website: www.blomus.com

Customer care service:

Name: Kundenservice

Website: blomus.com

Email: info@blomus.com

Phone: +49 (0)2933 831-600

Address:

Zur Hubertushalle 4

59846 Sundern

Germany